



**SECTION A-A**

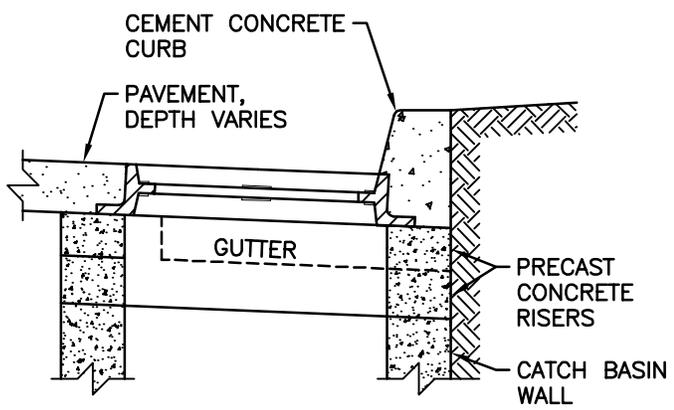


**SECTION B-B**

**VERTICAL CURB OR CURB AND GUTTER**

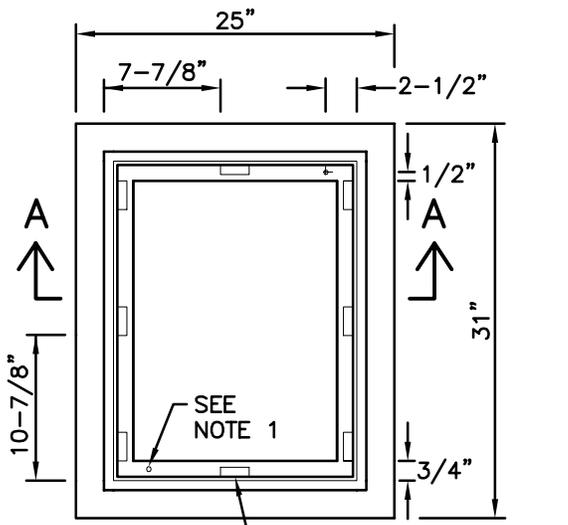

**PLAN**


LEVEL PAD 16  
3/4" x 2-1/4" x 1/8"

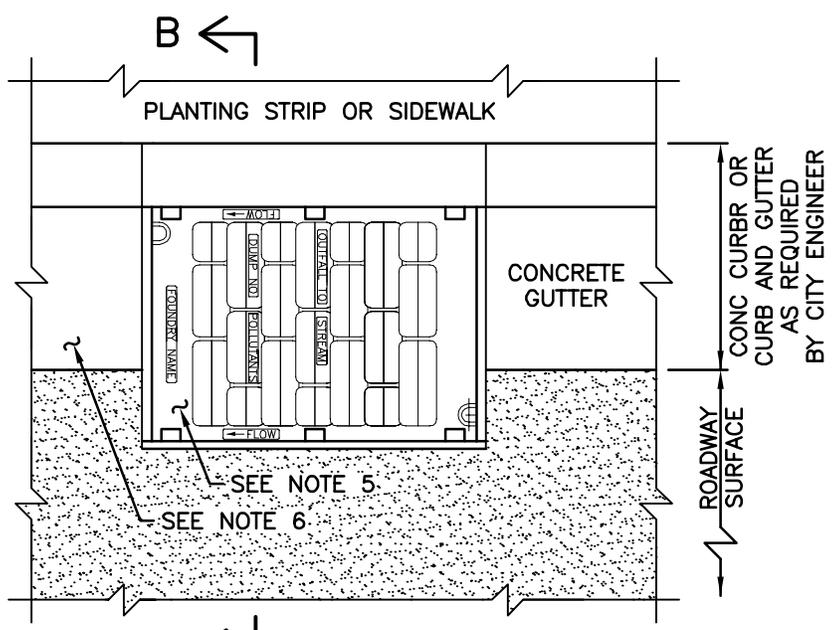

**PLAN**

**NOTES:**

1. DRILL AND TAP FOR, AND PROVIDE, TWO LOCKING BOLTS 5/8"-11 NC STAINLESS TYPE 304 STEEL SOCKET HEAD (ALLEN HEAD) BOLTS, 2" LONG.
2. FRAME MATERIAL IS CAST IRON PER ASTM A48 CLASS 30 OR BETTER.
3. SET FRAME TO GRADE AND CONSTRUCT ROAD AND GUTTER TO BE FLUSH WITH FRAME.
4. MATCH CENTERLINE OF CATCH BASIN TO CURB LINE FOR TYPE 1 AND 1-L.
5. VANED GRATE SHALL BE INSTALLED ON CONTINUOUS ROAD SLOPES. HERRINGBONE GRATES SHALL BE INSTALLED IN ALL SAGS AND SUMPS.
6. CURB/CURB AND GUTTER AS REQUIRED BY THE CITY ENGINEER.

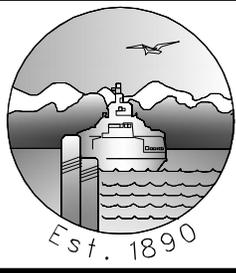

**CITY OF EDMONDS**  
PUBLIC WORKS  
DEPARTMENT

**STANDARD  
FRAME INSTALLATION**

APPROVED BY: **R. ENGLISH**

REVISION DATE  
**JANUARY 2018**

STANDARD  
DETAIL  
**SD-320**