



4" PERIMETER STRIPING
(TO BE 6" OFFSET FROM
CURB OR EDGE OF PAVEMENT)

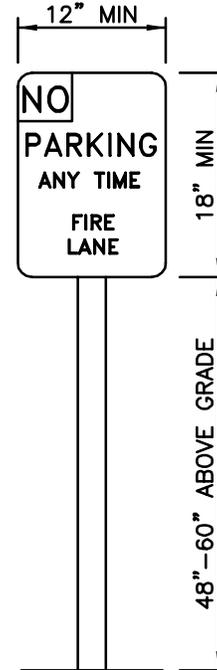

* THE USE OF SIGNS REQUIRES
FIRE MARSHAL APPROVAL

NOTES:

- ① FIRE LANE MUST MEET ALL MINIMUM CITY OF EDMONDS DRIVEWAY/ACCESS STANDARDS AND SOUTH SNOHOMISH COUNTY REGIONAL FIRE AUTHORITY'S (SSCRFA) FIRE LANE STANDARD.
- ② FIRE LANE SHALL MAINTAIN AN UNOBSTRUCTED MINIMUM WIDTH OF 20' UNLESS APPROVED BY THE FIRE MARSHAL.
- ③ FIRE LANE TO BE ASPHALT OR APPROVED EQUIVALENT.
- ④ FIRE LANE SHALL MAINTAIN AN UNOBSTRUCTED MINIMUM VERTICAL CLEARANCE OF 13.5'.
- ⑤ FIRE LANE SHALL NOT HAVE A GRADE EXCEEDING 12% UNLESS APPROVED BY SSCRFA.
- ⑥ PAINTED STRIPING SHALL BE YELLOW IN COLOR.
- ⑦ REFER ALSO TO CITY OF EDMONDS AND SSCRFA FIRE LANE STANDARD FOR CIRCULATION AND TURN-AROUNDS.

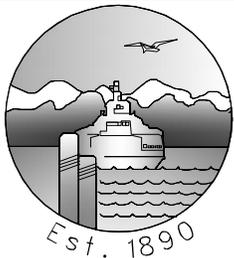

CITY OF EDMONDS
PUBLIC WORKS
DEPARTMENT

**FIRE LANE SPECIFICATIONS
(MULTI-FAMILY AND
COMMERCIAL)**

APPROVED BY: **R. ENGLISH**

REVISION DATE
JANUARY 2018

STANDARD
DETAIL
TR-567