



NOTES:

1. TAPER CURB HEIGHT FROM TOP OF CURB TO TOP OF CONCRETE GUTTER EXTENSION.
2. STREAMBED COBBLES SHALL BE 6" COBBLES PER WSDOT SPEC. 9-03.11(2).
3. A CONTINUOUS 4" EDGE STRIPE ALONG THE RADIUS OF THE CURB BULB, BETWEEN CURB FACES, MAY BE USED IN LIEU OF (2) RAISED PAVEMENT MARKERS IN THE GUTTER.

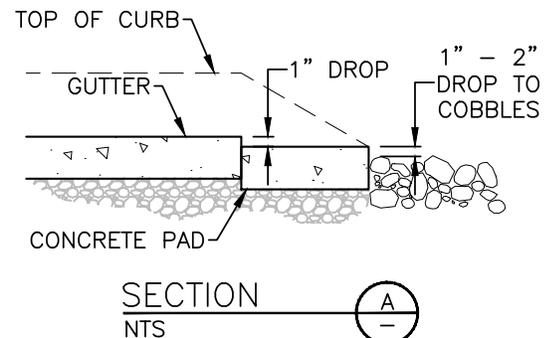

CITY OF EDMONDS
PUBLIC WORKS
DEPARTMENT

**CURB BULB
CURB CUT**

APPROVED BY: R. ENGLISH

REVISION DATE
DECEMBER 2017

STANDARD
DETAIL
TR-603