


4" OR 6" CONC. RISERS
(4" MIN.- MAX. HGT- 18")
GROUT AND PROVIDE
SMOOTH FINISH INSIDE
AND OUT

POLYPROPYLENE SAFETY STEP
12" O.C. (TYP)

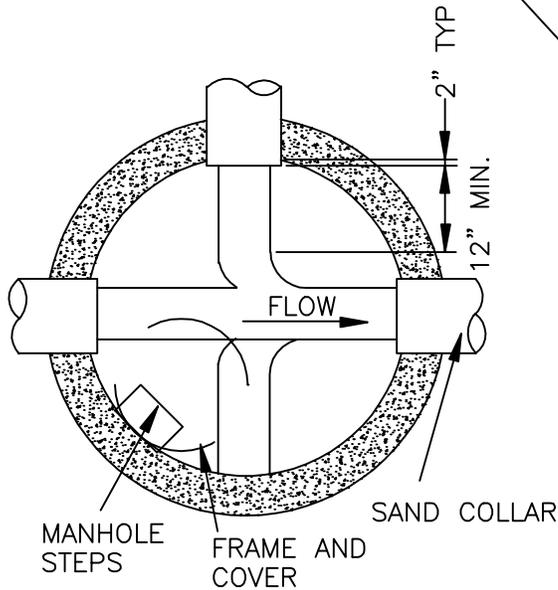

25" LOCKING LID
WITH THE WORD "SEWER" ON IT
(EAST JORDAN IRON WORKS CO.)
(MODEL #: 00370084)

ECCENTRIC PRECAST CONE

PRECAST SECTIONS
4" MIN. THICKNESS

48" or 54"

CONSTRUCT
CHANNEL SHELF

18"
MAX.


6" MIN.

REBAR MIN 2" CLEARANCE

N O T E:

1. LOCATE MH LID OUTSIDE THE WHEEL PATH OF THE TRAVEL LANE.
2. BASE REINFORCING SHALL BE #4 REBAR AT 12" O.C. BOTH WAYS.
3. LARGER MH TO BE REVIEWED ON A CASE BY CASE BASIS USING APWA STANDARDS.
4. JOINTS SHALL BE RUBBER GASKETED ONLY.

MH PER W.S.D.O.T. APWA
STANDARD PLAN B-23a.



CITY OF EDMONDS

REVISIONS	
APPROVED BY	DATE
D. GEBERT	6/16/03

STANDARD DETAIL

TYPE I MH (SANITARY)

DATE	7/24/01	SCALE	NTS	DWG NO.	E6.1
------	---------	-------	-----	---------	-------------